

De Lite | LED CEILING LIGHTING FIXTURE

Frame color:
 White

CCT:
 3000K
 4000K
 6000K



Model Number	Power	Input Voltage	Lumen	Size	Install Method
HD-AL25-10-12W	20W	AC100-240V	1680-1880 Lm	Φ115x160mm	surface mounted
HD-AL25-12-18W	40W	AC100-240V	3400-3600 Lm	Φ140x165mm	surface mounted
HD-AL25-16-25W	60W	AC100-240V	5220-5420 Lm	Φ165x190mm	surface mounted

Frame color:
 Black

CCT:
 3000K
 4000K
 6000K



Model Number	Power	Input Voltage	Lumen	Size	Install Method
HD-AL24A-12-18W	18W	AC100-277V	1300-1400 Lm	Φ298x51mm	surface mounted
HD-AL24B-12-18W	18W	AC200-240V	1300-1400 Lm	Φ298x51mm	surface mounted
HD-AL24A-12-25W	25W	AC100-277V	1850-1900 Lm	Φ298x51mm	surface mounted
HD-AL24B-12-25W	25W	AC200-240V	1850-1900 Lm	Φ298x51mm	surface mounted

De Lite | LED DOWNLIGHT FIXTURE

Frame color:
 White
 Black

CCT:
 3000K
 4000K
 6000K



Model Number	Input Voltage	Power	Lumen	Size	Install Method
HD-OM5	AC100-240V	5W	370-420 Lm	Φ68x88mm	surface mounted
HD-OM7	AC100-240V	7W	520-590 Lm	Φ88x87mm	surface mounted
HD-OM9	AC100-240V	9W	670-760 Lm	Φ108x108mm	surface mounted
HD-OM12	AC100-240V	12W	900-1020 Lm	Φ128x128mm	surface mounted
HD-OM18	AC100-240V	18W	1350-1530 Lm	Φ148x148mm	surface mounted
HD-ON5	AC100-240V	5W	370-420 Lm	Φ68x75mm	surface mounted
HD-ON7	AC100-240V	7W	520-590 Lm	Φ88x75mm	surface mounted
HD-ON9	AC100-240V	9W	670-760 Lm	Φ108x90mm	surface mounted
HD-ON12	AC100-240V	12W	900-1020 Lm	Φ128x105mm	surface mounted
HD-ON18	AC100-240V	18W	1350-1530 Lm	Φ148x120mm	surface mounted

Frame color:
 White
 Black

CCT:
 3000K
 4000K
 6000K




Model Number	Power	Input Voltage	Lumen	Size	Install Method
HD-PD02-10W	10W	AC 100-277V	850-870 Lm	Φ80x130mm	surface mounted
HD-PD02-18W	18W	AC 100-277V	1400-1600 Lm	Φ80x160mm	surface mounted
HD-PD02-25W	25W	AC 100-277V	1970-2050 Lm	Φ112.5x160.5mm	surface mounted

De Lite | LED DOWNLIGHT FIXTURE

Frame color:
 White

CCT:
 3000K
 4000K
 6000K

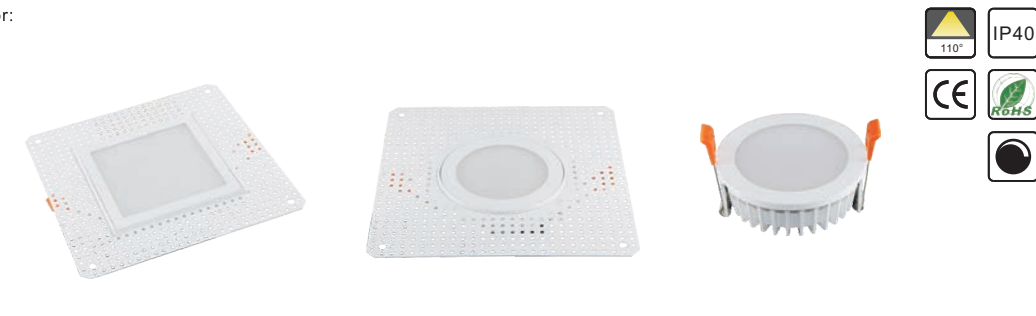

*CCT of DC24V version can be single color / RGBW / 3000-6000K CCT adjustable.
 *CCT of AC100-240V version is single color only.

Model Number	Power	Input Voltage	Lumen	Size	Cut Out
HD-US-A	12W	DC24V AC100-240V	1020-1100 Lm	204x204x46mm	130x130mm
HD-UR-A	12W	DC24V AC100-240V	1020-1100 Lm	204x204x46mm	Φ127mm
HD-UR-B	12W	DC24V AC100-240V	1020-1100 Lm	Φ112x46mm	Φ105mm

Frame color:
 White

CCT:
 2700K
 3000K
 4000K
 5000K
 6000K




Model Number	Power	Input Voltage	Lumen	Size	Cut Out
HD-DL77-2.5-10W	10W	AC200-240V	720-780 Lm	Φ96x68mm	Φ85-90mm
HD-DL77-2.5-35W	35W	AC200-240V	3250-3550 Lm	Φ180x128.5mm	Φ165-170mm
HD-DL77-2.5-45W	45W	AC200-240V	4000-4350 Lm	Φ180x128.5mm	Φ165-170mm

De Lite | LED GRILLE LIGHT

Frame color:
 White

CCT:
 2700K
 3000K
 4000K
 5000K
 6000K



Model Number	Power	Input Voltage	Lumen	Size	Cut Out
HD-OG8	8W	AC100-240V	600-680 Lm	110x110x122mm	100x100mm
HD-OG12	12W	AC100-240V	900-1020 Lm	132x132x140mm	120x120mm
HD-OG16	2x8W	AC100-240V	1200-1360 Lm	190x110x122mm	180x100mm
HD-OG24A	2x12W	AC100-240V	1800-2040 Lm	232x132x140mm	220x120mm
HD-OG24	3x8W	AC100-240V	1800-2040 Lm	263.5x110x122mm	255x100mm
HD-OG36	3x12W	AC100-240V	2700-3060 Lm	340x130x140mm	330x120mm
HD-OG32	4x8W	AC100-240V	2400-2720 Lm	190x190x122mm	180x180mm
HD-OG48	4x12W	AC100-240V	3600-4080 Lm	232x132x140mm	220x220mm

Frame color:
 Black

CCT:
 2700K
 3000K
 4000K
 5000K
 6000K



Model Number	Power	Input Voltage	Lumen	Size	Cut Out
HG-RD04-8W	1x8W	AC100-240V	460-550 Lm	100x100x135mm	85x85mm
HG-RD04-16W	2x8W	AC100-240V	920-1100 Lm	180x100x135mm	165x85mm
HG-RD04-24W	3x8W	AC100-240V	1380-1650 Lm	260x100x135mm	245x85mm
HG-RD05-12W	1x12W	AC100-240V	820-930 Lm	130x130x155mm	115x115mm
HG-RD05-24W	2x12W	AC100-240V	1650-1870 Lm	239x130x155mm	224x115mm
HG-RD05-36W	3x12W	AC100-240V	2480-2800 Lm	349x130x155mm	334x115mm